


STANDARD PROFILES

ROLLER CHAIN PROFILES

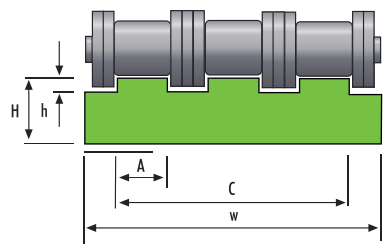

TRIPLE CHAIN

REFERENCE	STEP	ISO	W	H	A	h	C	Kg/m
LA - 28	3/8"	06 - B3	35	10	5.5	1.5	25.9	0.306
LA - 29	1/2"	08 - B3	45	10	7.5	2.2	35.3	0.381
LA - 30	1/2"	08 - B3	45	15	7.5	2.2	35.3	0.595
LA - 31	1/2"	08 - B3	45	20	7.5	2.2	35.3	0.808
LA - 32	5/8"	10 - B3	55	10	9.3	2.6	40.5	0.455
LA - 33	3/4"	12 - B3	65	10	11.3	2.4	50.3	0.546
LA - 34	1"	16 - B3	95	15	16.5	3.5	80.3	1.167
LA - 35	1" ¼	20 - B3	105	15	19	4.2	92	1.304
LA - 36	1" ½	24 - B3	135	20	24.7	5.5	121.5	2.247
LA - 37	1" ¾	28 - B3	170	25	30.1	6.8	149.3	3.522
LA - 38	2"	32 - B3	170	30	30.1	7.7	149.3	4.262